
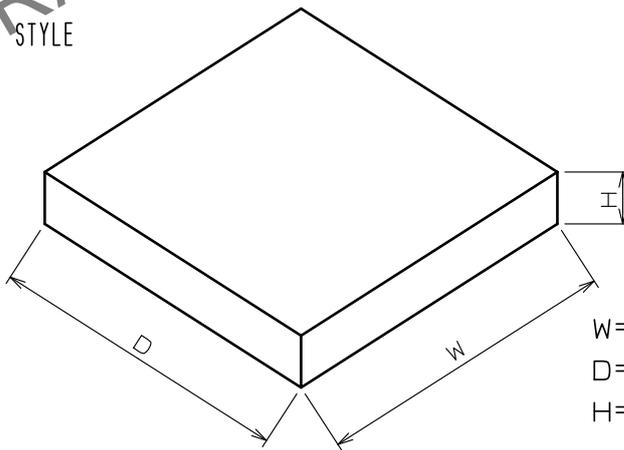


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV, RoHS COMPLIANT

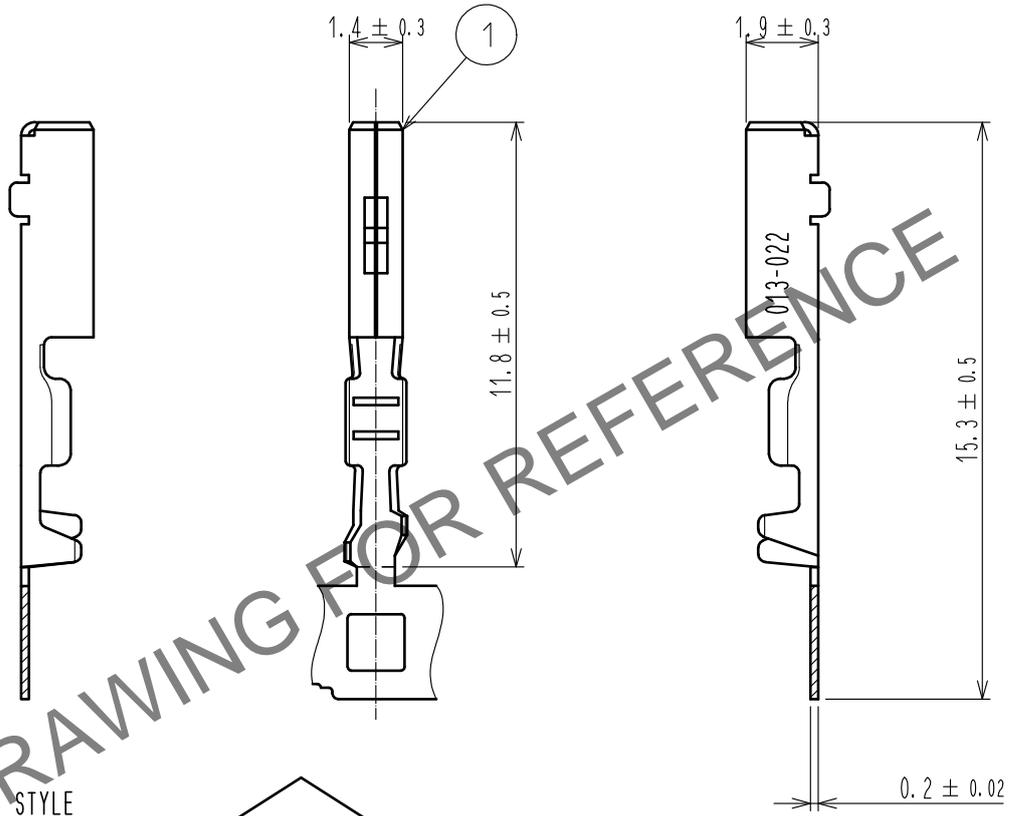

W=570 mm
 D=570 mm
 H= 55 mm

Note1. 10,000 PCS/RL

2. REGARDING HOW TO HANDLE THE PACKAGED PRODUCTS, PLEASE REFER TO THE ATAD-T0946-00「INSTRUCTION MANUAL FOR HANDLING OF REEL PACKAGING CONTAINING CRIMP TERMINALS」

| | | | | | | | |
|--------------------------------------|--------------|----------------|------------|--|-----------------------|------------------------|------------------|
| 1 | COPPER ALLOY | TIN PLATED | | | | | |
| NO. | MATERIAL | FINISH . | REMARKS | NO. | MATERIAL | FINISH . | REMARKS |
| UNITS mm | | SCALE 5 : 1 | COUNT 1 | DESCRIPTION OF REVISIONS DIS-T-00013628 | DESIGNED AN. SAIKI | CHECKED HH. TSUKUMO | DATE 20220524 |
| HRS HIROSE ELECTRIC CO., LTD. | APPROVED | ·HS. OZAWA | 20141212 | DRAWING NO. | EDC4-169605-00 | | |
| | CHECKED | ·HS. OZAWA | 20141212 | PART NO. | GT25HB-2428SCF | | |
| | DESIGNED | ·HH. TSUKUMO | 20141212 | CODE NO. | CL0775-0070-6-00 | | |
| | DRAWN | ·TT. YOSHIDA | 20141212 | | 1/1 | | |